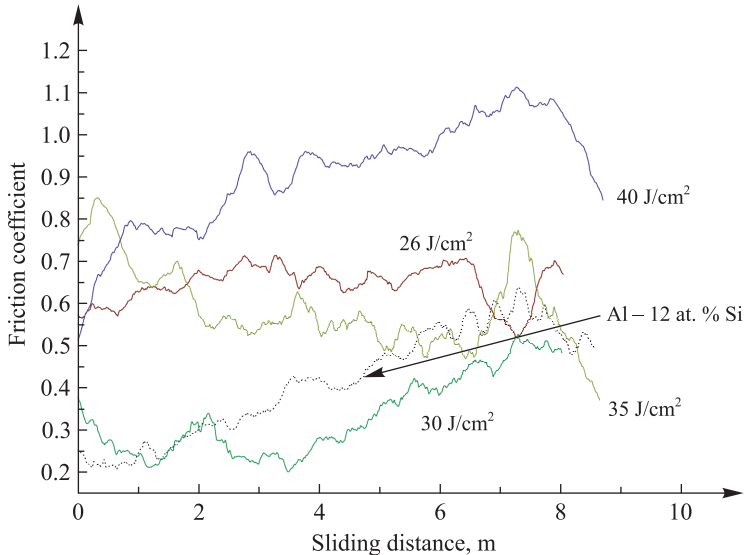




*Fig. 7.* Dependence of the friction coefficient on the indenter sliding distance for the sample of Al – 12 at. % Si alloy and samples of (Ti, Cu)N/Al – 12 at. % Si treated by CPF with different absorbed energy density