

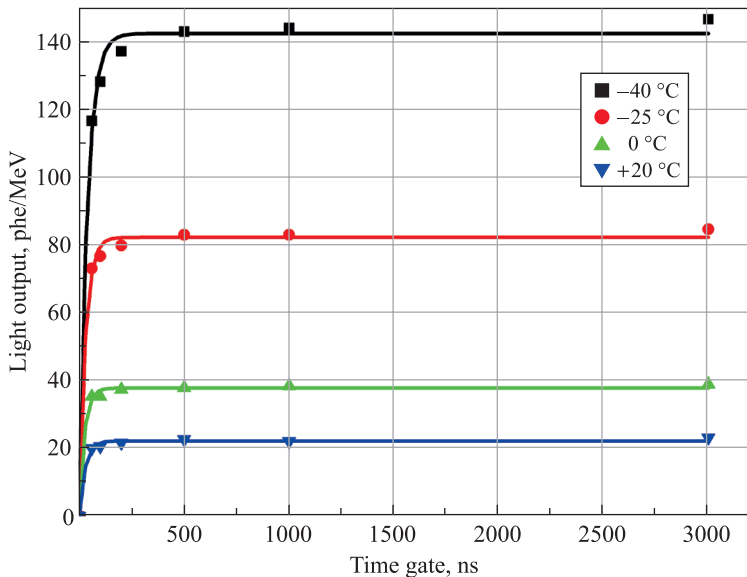


Fig. 1. Gated light output of PWO scintillator ($20 \times 20 \times 200$ mm) coupled to a Hamamatsu R2059 photomultiplier (Japan) tube at different temperatures